

S-Series Key Cabinets

Modular Design

Designed to accommodate **between 10 and 60 keys (or key sets)**, the innovative S-Series design allows for starting small and later expanding by adding multiples of 10 key positions (called receptor strips) as required.

Receptor strips are defined as locking or non-locking. Locking receptor strips **lock the iFob™** in place restricting access to authorised personnel down to the individual key. Non-locking receptor strips provide a solution for organisations requiring less security but still an audit of key usage. **Tri-colour LED's** indicate which keys can be taken, which keys are restricted and assist the user with returning the key to the correct location.




Fig 1. Locking Receptor Strip with tri-colour LED's

Extension cabinets can be connected to the S-Series system allowing up to a maximum of **540 keys** to be managed from a single control pod.

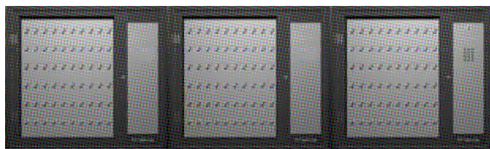


Fig 2. S-Series system with 2 extension cabinets example

The control pod consists of the user interface which includes the LCD, keypad and card or biometric reader.

The cabinets can be supplied with a clear polycarbonate or metal door, or with no door if specified.

PC Software Administration

The S-Series is administered from the user friendly **Traka32 Windows software** supporting a **Microsoft Access** or **SQL database**.

The S-Series can communicate with the Traka32 software using a range of different options including **Ethernet**, **Wireless Ethernet**, **GPRS**, **RS485**, **RS232** and **modem**.

Multiple systems can be networked together over a Local or Wide Area Network to provide accountability for a **limitless** number of keys administered from multiple PC workstations running the Traka32 software.

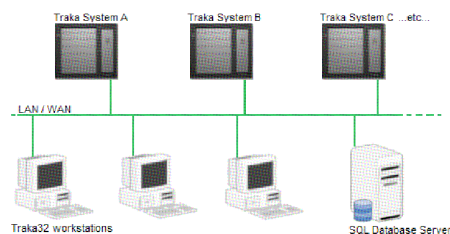


Fig 3. Typical network setup



User Identification

The S-Series can support any type of access control device required to identify a user to the key system. Supported devices include **RFID proximity readers** from all leading access control manufacturers, **magstripe**, **barcode** and **biometric technologies** such as **fingerprint**, **hand**, **vascular** and **retina** scanners are also supported.



SPECIFICATION

Cabinets Dimensions: H650 x W740 x D150 (mm)

Power Supply: Input: AC100-240V
Output: DC15V

Battery Backup: DC12V 3.2Ah (24 hours)

Power Consumption: 30W max

Cabinet Material: Zintec Steel

Color Options: Black MNA03 or Cream RAL1013 powder coated

Door Material: Clear polycarbonate or metal

Operating Temp: Ambient. For indoor use only

Mounting: Wall or cabinet stand mounted

Key Positions: 10-60 (120 double density) Extension cabinets allow up to 540 keys

Receptor Strip Support: Locking, Non locking, Double Density (20 positions), combination of both - all support Tri-Color LED's

Users per system: 16,000

Communications: Ethernet (AES-256 encryption optional), Wireless Ethernet, GPRS, RS485, RS232, Modem

Reader Interface: Wiegand, Clock/Data ABA Tk2, RS232, TTL, Wiegand Anti passback, PIN only

Alarm Interface: 3 x 1A/24V relay contacts for connecting to alarms, access control systems, CCTV etc
Certifications: CE, FCC, ROHS, UL & CSA

Note: - For specific information on the vast array of standard and optional software features available please contact us.



TIME ACCESS SYSTEMS INC.

501-20170 Stewart Crescent, Maple Ridge, BC, V2X 0T4

Tel: 604-460-8670 Toll Free: 1-877-460-9602 Fax: 604-460-8690

sales@timeaccessinc.com

www.timeaccessinc.com